



# DFED20W SERIES

DIN RAIL DC-DC CONVERTER

4:1 ULTRA WIDE INPUT RANGE  
UP TO 20 Watts



## FEATURES

- NO MINIMUM LOAD REQUIRED
- 1600VDC INPUT TO OUTPUT ISOLATION
- SCREW TERMINALS FOR INPUT AND OUTPUT CONNECTIONS
- RELIABLE SNAP-ON FOR DIN RAIL TS-35/7.5 OR TS-35/15
- CASE PROTECTION MEET IP20(IEC60529)
- INTERNAL OUTPUT DC-OK INDICATOR
- MEET EN55022 CLASS B
- SAFETY MEETS UL60950-1, EN60950-1, & IEC60950-1
- CE MARKED
- COMPLIANT TO RoHS II & REACH

## APPLICATIONS

- COMMUNICATION SYSTEM
- INDUSTRY CONTROL SYSTEM
- FACTORY AUTOMATIC EQUIPMENT
- SEMICONDUCTOR EQUIPMENT

1600VDC ISOLATION	REMOTE CONTROL	UVP	OCP	SCP	OVP	FUSE INCLUDED	INRUSH LIMIT	REVERSE POLARITY PROTECTION
-------------------	----------------	-----	-----	-----	-----	---------------	--------------	-----------------------------

## TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range VDC	Output Voltage VDC	Output Current @ Full Load mA	Input Current @ No Load mA	Efficiency %	Maximum Capacitor Load (1) µF
DFED20-24S3P3W	9.5 ~ 36	3.3	5500	52	83	18000
DFED20-24S05W	9.5 ~ 36	5	4000	67	86	9600
DFED20-24S12W	9.5 ~ 36	12	1670	26	84	1650
DFED20-24S15W	9.5 ~ 36	15	1330	27	84	1050
DFED20-24D05W	9.5 ~ 36	±5	±2000	59	86	±4800
DFED20-24D12W	9.5 ~ 36	±12	±833	34	85	±825
DFED20-24D15W	9.5 ~ 36	±15	±667	35	85	±525
DFED20-48S3P3W	18 ~ 75	3.3	5500	37	83	18000
DFED20-48S05W	18 ~ 75	5	4000	37	86	9600
DFED20-48S12W	18 ~ 75	12	1670	18	85	1650
DFED20-48S15W	18 ~ 75	15	1330	18	85	1050
DFED20-48D05W	18 ~ 75	±5	±2000	37	87	±4800
DFED20-48D12W	18 ~ 75	±12	±833	20	86	±825
DFED20-48D15W	18 ~ 75	±15	±667	20	86	±525

## PART NUMBER STRUCTURE

DFED20 -	<b>48</b>	<b>S</b>	<b>05</b>	<b>W</b> -	<b>N</b>
Series Name	Input Voltage (VDC) 24: 9.5-36 48: 18-75	Output Quantity S: Single	Output Voltage (VDC) 3P3: 3.3 05: 5 12: 12 15: 15	Input Range 4:1	Remote Control Option □: Positive logic N: Negative logic
		D: Dual	05: ±5 12: ±12 15: ±15		

**INPUT SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom)		9.5	24	36	VDC
	48Vin(nom)		18	48	75	
Input fuse (slow blow)	24Vin(nom)			6		A
	48Vin(nom)			4		
In-rush current				15		A
Input reflected ripple current	Nominal input and Full load			10		mAp-p
Start up voltage	24Vin(nom)				9.5	VDC
	48Vin(nom)				18	
Shutdown voltage	24Vin(nom)			7.5		VDC
	48Vin(nom)			15		
Start up time	Nominal input and Constant resistive load	Power up		100		ms
		Remote ON/OFF		20		
Input surge voltage	100ms, max.	24Vin(nom)			50	VDC
		48Vin(nom)			100	
Remote ON/OFF	Referred to -Vin pin	Positive logic	DC-DC ON	Open or 3 ~ 12VDC		mA
		(Standard)	DC-DC OFF	Short or 0 ~ 1.2VDC		
		Negative logic	DC-DC ON	Short or 0 ~ 1.2VDC		
		(Option)	DC-DC OFF	Open or 3 ~ 12VDC		
		Input current of Ctrl pin		-0.5	0.5	
		Remote off input current			2.5	

**OUTPUT SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy	3.3Vout		-1.5		+1.5	%
	Others		-1.0		+1.0	
Line regulation	Low Line to High Line at Full Load	Single	-0.2		+0.2	%
		Dual	-0.5		+0.5	
Load regulation	No Load to Full Load		-1.5		+1.5	%
Cross regulation	Asymmetrical load 25%/100% FL		-5.0		+5.0	%
Voltage adjustability	Single output		-10		+10	%
Ripple and noise	Measured by 20MHz bandwidth	Single	3.3Vout,	60		mVp-p
			5Vout, 12Vout, 15Vout	75		
		Dual	All	100		
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			250		µs
Over voltage protection	Zener diode clamp	3.3Vout		3.9		VDC
		5Vout		6.2		
		12Vout		15		
		15Vout		18		
Output indicator				Green LED		
Over load protection	% of Iout rated; Hiccup mode			150		%
Short circuit protection				Continuous, automatic recovery		

**GENERAL SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	1600			VDC
		Input (Output) to Chassis	1600			
Isolation resistance	500VDC		1			GΩ
Isolation capacitance					4000	pF
Switching frequency			360	400	440	kHz
Safety meets						UL60950-1 EN60950-1 IEC60950-1
Chassis material						Aluminum
Weight						147.5g (5.19oz)
MTBF	MIL-HDBK-217F, Full load					1.619 x 10 <sup>6</sup> hrs

**ENVIRONMENTAL SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating	-40		+78	°C
	With derating	+78		+93	
Storage temperature range		-40		+105	°C
Thermal shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH


**EMC SPECIFICATIONS**

Parameter	Conditions	Level
EMI	EN55022	Class B
ESD	EN61000-4-2	Perf. Criteria A
Radiated immunity	EN61000-4-3	Perf. Criteria A
Fast transient	EN61000-4-4	Perf. Criteria A
Surge	EN61000-4-5	Perf. Criteria A
Conducted immunity	EN61000-4-6	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	Perf. Criteria A


**Note:**

1. Test by minimum input and constant resistive load.


**CHARACTERISTIC CURVE**

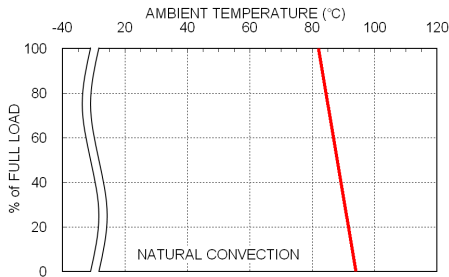

DFED20-48S05W Derating Curve

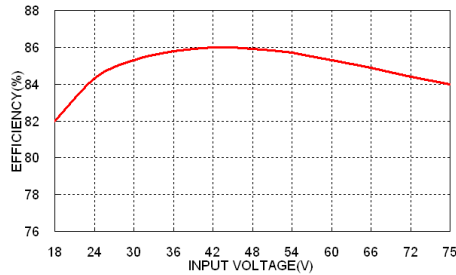


DFED20-48S05W Efficiency vs. Input Voltage

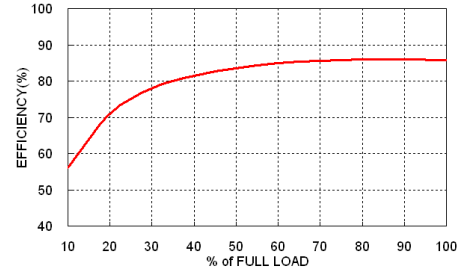

DFED20-48S05W Efficiency vs. Output Load

**MECHANICAL DRAWING**

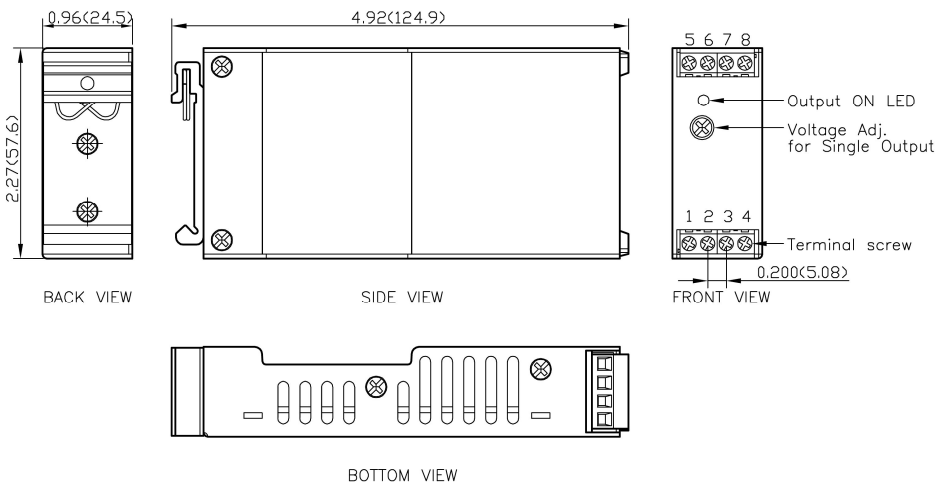

**PIN CONNECTION**

PIN	SINGLE	DUAL
1	Ctrl	Ctrl
2	-Vin	-Vin
3	-Vin	-Vin
4	+Vin	+Vin
5	NC	NC
6	-Vout	-Vout
7	+Vout	Common
8	NC	+Vout

- \* NC : No Connection
- \* Screw terminals – wire range from 14 to 18 AWG

1. All dimensions in Inch (mm)
2. Tolerance : X.XX±0.02 (X.X±0.5)
4. Tolerance : X.XXX±0.01 (X.XX±0.25)
3. Terminal screw locked torque : MAX 2.5kgf-cm (0.25N-m)